

# Hegytípusok T18

## Model

- [HAKKO FX-888](#)
- Forasztópáka: HAKKO FX-8801(65W)
- Forasztópáka: HAKKO FX-8802(65W)
- Forasztópáka: HAKKO FX-8803(65W) Új

## Alkalmazható típusok



**HAKKO  
FX-8801**



**HAKKO  
FX-8802**




**HAKKO  
FX-8803**

Ehhez az állomáshoz  
csatlakoztatható




[HAKKO  
FX-888](#)

### HAKKO FX-8801

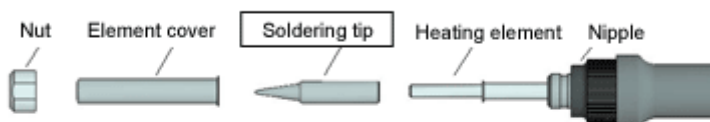


### HAKKO FX-8802

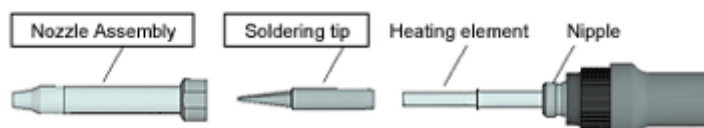




## Shape BC/C


This type has a shape like a cone or column cut at a slant, which allows users to select the cut surface size depending on the workpiece. It is used for drag soldering and pre-tinning of lead wires.




T18-C05 Shape-0.5C




T18-C08 Shape-0.8C




T18-C1 Shape-1C



T18-C2 Shape-2C




T18-C3 Shape-3C




T18-C4 Shape-4C







- T18-C5 Shape-5C NEW




- T18-CF1 Shape-1CF  
Tinned cut surface only




- T18-CF15 Shape-1.5CF  
Tinned cut surface only




- T18-CF2 Shape-2CF  
Tinned cut surface only



- T18-CF3 Shape-3CF  
Tinned cut surface only




- T18-CF4 Shape-4CF  
Tinned cut surface only



- T18-CSF25 Shape-2.5CSF  
This type has good heat transfer with short tip end design, tinned cut surface only.







- T18-S6 Shape-S6 NEW

## Shape B


All-round type which can be used from any direction and is easy to hold at any position. Possible to solder any surface from small to large.




- T18-B Shape-B



- T18-BL Shape-BL NEW



- T18-S4 Shape-S4 NEW




- T18-SB Shape-SB




## Shape D

This type has a shape like a flat-blade screwdriver and is capable of soldering by applying the tip in 2 ways: line and face.


The width (size of tip) suitable for the workpiece can be selected, and it can be used for any soldering work.




- T18-D08 Shape-0.8D




- T18-D12 Shape-1.2D




- T18-D16 Shape-1.6D



- T18-D24 Shape-2.4D




- T18-D32 Shape-3.2D




- T18-DL12 Shape-1.2DL NEW







- T18-DL2 Shape-2DL NEW



- T18-DL32 Shape-3.2DL NEW



- T18-S3 Shape-S3 NEW




- T18-S9 Shape-S9 NEW

## Shape I

This type has a thin conical end and is an ultrafine tip which is best suited for soldering at narrow pitches, etc.

It is the best for soldering micro components such as 0603, etc. and for repairing high-density-mounting P.W.Bs. such as in cellular phones, etc.




- T18-I Shape-I



## Shape J

This type differs from Shape B and I by bending the tip end and is capable of soldering by applying the tip in 2 ways: face and point.

It is used for drag soldering and correction of bridging.




- T18-BR02 Shape-0.2BR NEW

## Shape K

This type has a shape like a knife and is capable of soldering by applying the tip in 3 ways: line, face and point.

It is used for soldering at narrow pitches, correction of bridging and drag soldering.



- T18-K Shape-K